UNCLASSIFIED

AD NUMBER
ADB007108
LIMITATION CHANGES

TO:

Approved for public release; distribution is unlimited.

FROM:

Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; 12 AUG 2009. Other requests shall be referred to Army Research Laboratory, Attn: ARL-APG Security Office, RDRL-LOA-I, Aberdeen Proving Ground, MD 21005.
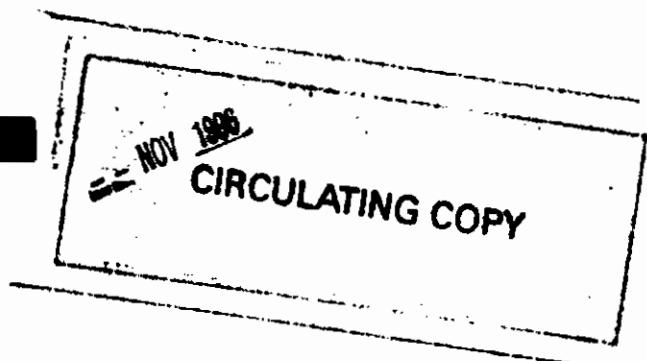
AUTHORITY
ARL Form 1 dtd 3 Feb 2013

THIS PAGE IS UNCLASSIFIED

BRL

REPORT NO. 1829

THE EDIT-COMGEOM CODE

Gary G. Kuehl

September 1975

USA BALLISTIC RESEARCH LABORATORIES
ABERDEEN PROVING GROUND, MARYLAND

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
BRL REPORT NO. 1829		

4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED
THE EDIT-COMGEOM CODE	FINAL
	6. PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s)	8. CONTRACT OR GRANT NUMBER(s)
Gary G. Kuehl	

9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
US Army Ballistic Research Laboratories Aberdeen Proving Ground, Maryland 21005	RDTE Project 1T662618AH80

11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE
US Army Materiel Command 5001 Eisenhower Avenue Alexandria, Virginia 22333	SEPTEMBER 1975
	13. NUMBER OF PAGES
	33

14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)	15. SECURITY CLASS. (of this report)
	UNCLASSIFIED
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Distribution limited to US Government agencies only; Test and Evaluation; Sep 75. Other requests for this document must be referred to Director, US Army Ballistic Research Laboratories, ATTN: AMXBR-SS, Aberdeen Proving Ground, Maryland 21005

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Target Description Data
Computer Code
Target Structural Analysis
Target Vulnerability Analysis
Target Signature Analysis

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

This report assumes a familiarity with the GIFT and MAGIC computer codes. The EDIT-COMGEOM code is a FORTRAN computer code. The EDIT-COMGEOM code converts the target description data which was used in the MAGIC computer code to the target description data which can be used in the GIFT computer code. Changes are also made to the target description data to decrease computer run time and computer memory.

TABLE OF CONTENTS

I. INTRODUCTION

1.1 Background

The original EDIT-COMGEOM code was written by Mr. Larry Bain of Army Materiel Systems Analysis Agency: the version of the EDIT-COMGEOM code presented in this report is an improvement of the original code.

This report assumes a familiarity with the MAGIC[1] and the GIFT[2] codes. The EDIT-COMGEOM code converts target description data used as input to the MAGIC code into target description data which can be used as input to the GIFT code.

The air space (01) enclosing the target used by the MAGIC code can be deleted in the GIFT code. The EDIT-COMGEOM code deletes those regions defined as "01" air spaces and when possible the solids associated with those regions are also deleted. The GIFT code has a new solid type called RPP which requires less computer storage and computer run time than either the BOX or the ARB solid. The EDIT-COMGEOM code converts the BOX and the ARB solids which are equivalent to RPP's into RPP solids.

After the above changes are made, a renumbering and reordering of the target description data for the MAGIC code is required before the data can be used as input for the GIFT code. The EDIT-COMGEOM code does the renumbering and reordering.

1.2 Contents of this Report

This report contains three sections and three appendices. The first section discusses the requirements and limitations of the EDIT-COMGEOM code. The second section describes the input requirements for the code. The third section describes the output of the code. Appendix A is a listing (print-out) of the code. Appendix B is a listing of a sample input. Appendix C is a listing of the output from the sample input.

---

[1] NWC Technical Note 4565-3-71; Volumes I & II; "MAGIC Computer Simulation, Volume I, User Manual; Volume II, Analyst Manual," by Armament Systems, Inc., and Propulsion Development Department, May 1971. (Available from Department of the Navy, Naval Weapons Center, China Lake, California 93555).

[2] Lawrence W. Bain & Mathew J. Reisinger, "The GIFT Code User Manual; Volume I Introduction and Input Requirements," BRL Report No. 1802, April 1975.

II.   GENERAL DISCUSSION

2.1   Required Tapes

The EDIT-COMGEOM code requires three temporary binary tapes on FORTRAN units 10, 11, and 12. Disc or drum may be substituted for these tapes. The tape on FORTRAN unit 10 contains the region table created by EDIT-COMGEOM Code. The tape on FORTRAN unit 11 contains the MAGIC Solid Table, and the tape on FORTRAN unit 12 contains the original MAGIC Region Table.

An array called "IDENT" is used to store the Region Identification Table. It is dimensioned for 1000 regions. An array called "ISOLID" flags those solids to be kept in the target description data. It is dimensioned for 2500 solids. The Solid Table, Region Table and Region Identification Table will be discussed in more detail in later sections of this report.

2.2   Converting the Code for use by Different Computers

The EDIT-COMGEOM code, listed in Appendix A, runs on either the CDC or Univac computers. The code can be made to run on BRLESC (or IBM) computer by changing the comment cards labeled in card columns 73-80 with "BRLESC" (or "IBM") to executable statements. Cards labeled in columns 73-80 with other computers must be removed or changed to comment cards.

For example, the arrowed lines in the listing of the code in Appendix A are as follows:

```
C 104 CALL SETCWD (4)                                        BRLESC
C      DECODE (80,32,SOL(1)) IREG, (IOP(I),ISOL(I),I=1,9)    BRLESC
```

In order to use the EDIT-COMGEOM code on the BRLESC computer, "C" would be removed. The four lines following the above lines:

```
104 WRITE (10,31) SOL                                        UNIVAC
    REWIND 10                                                IBM
    READ  (10,40) IREG, (IOP(I),ISOL(I),I=1,9)               AND
    REWIND 10                                                CDC
```

would be removed or changed to comment cards.

6

III. INPUT

3.1 Control Card

The control card is the first data card. It specifies the FORTRAN input and output unit numbers. The format of the card is shown in Figure 1.

3.2 MAGIC Target Description Data

The MAGIC target description data follows the control card. The form of the data is reported in reference 1,"MAGIC Computer Simulation."

The data consists of:

(a) A Title Card.

(b) A Target Input Constraints Card.

(c) A set of solid descriptions called a Solid Table.

(d) A set of regions described in terms of combinations of solids called a Region Table.

(e) A set of alphanumeric descriptions of a region called a Region Identification Table.

3.3 Target Input Constraints Card

The input data for the EDIT-COMGEOM code uses the same input format as stated in technical note "MAGIC Computer Simulation," except for the Target Input Constraints card. The format of the Target Input Constraints card is shown in Figure 2.

3.4 Order of Input

A summary of the order of the data for EDIT-COMGEOM code is shown in Figure 3. A listing of a sample input for the EDIT-COMGEOM code is located in Appendix B.

7

1-5	6-10	11-15
(BLANK)	IN	IOUT

FORMAT: (5X, 2I5)

Name	Columns	Remarks
IN	6-10	The FORTRAN unit number for the input. (If "IN" equals 0, it is set to 5 by the code.)
IOUT	11-15	The FORTRAN unit number for the output. (If "IOUT" equals zero, it is set to 6 by the code.)

Figure 1. Control Card

1-10	11-20	21-30
NRPP	NSOL	NREGON

FORMAT: (3I10)

Name	Columns	Remarks
NRPP	1-10	The number of rectangular parallelepipeds (RPPs) used to describe the target's environment.
NSOL	11-20	The number of solids other than the above RPPs used to describe the target.
NREGON	21-30	The number of regions used to describe the target.

Figure 2. The Target Input Constraints Card

8
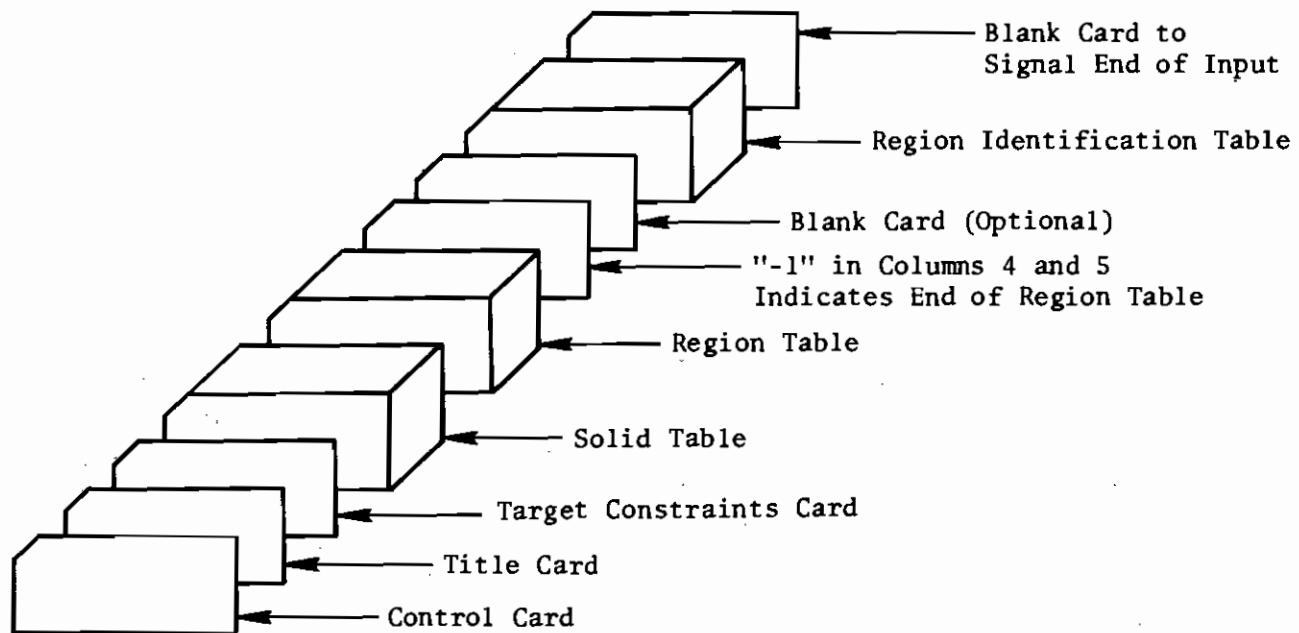
Figure 3. Card Order for Input

IV. OUTPUT

A listing of the output of the EDIT-COMGEOM using the Sample Input of Appendix B is located in Appendix C.

4.1 Solid Table

A sample line of output of the Solid Table is:

```
1RPP       -75.0000   75.0000  -36.0000   36.0000   12.0000   48.0000     2     3
```

The number in columns 1-3 (the number is 1 in the example above) is the new solid number. If the solid number is greater than 1000, only the last three digits are used. The number in columns 70-75 ("2" in the example above) is the solid number used in the MAGIC target description data. The number in columns 76-80 ("3" in the example above) is the card or line count of the GIFT target description data.

Those ARB or BOX solids which have been converted to an RPP have the following message printed:

```
BOX    3 HAS BEEN CONVERTED TO A RPP.
```

4.2 Region Table

A sample line of output of the Region Table is:

```
1 OR   1     -2     -6     -7     -8     -9     -100R    30R    4     2    81
```

The number in columns 1-5 (the number is 1 in the example above) is the new region number. The number in columns 71-75 ("2" in the example above) is the region number used in the MAGIC target description data. The number in columns 76-80 ("81" in the example above) is the card or line count of the GIFT target description data.

The solid numbers in columns 6-69 in the MAGIC target description used to describe a region are replaced with the new solid numbers represented in the new Solid Table of the output.

4.3 Region Identification Table

A sample line of output for the Region Identification Table is:

```
1        100        0        BODY                              2    96
```

Columns 71-80 are used for labeling as described for the Region Table above. Any alphanumeric region description data located in columns 71-80 of the MAGIC target description data will be deleted.

4.4 Summary Table

The Summary Table contains the number and listing of solids and regions deleted from the MAGIC target description data. In the sample below, 1 solid and 1 region were deleted: the solid deleted and region deleted were both numbered "1":

10

```
NUMBER OF SOLIDS DELETED     1
     1

NUMBER OF REGIONS DELETED     1
     1
```

Appendix A: A Listing of the Code

```
C     EDIT-COMGEOM PROGRAM
C
C     PROGRAM DELETES ALL REGIONS IDENTIFIED AS AIR 1
C     AND CHANGES 'MAGIC' BODIES TO 'GIFT' BODIES
C        ARRAYS ARE DIMENSIONED FOR 1000 REGIONS AND 2500 SOLIDS
C
C     INPUT
C        SPECIFY INPUT AND OUTPUT UNITS
C           6-10   IN   - INPUT UNIT - IF 0 DEFAULTS TO CARD READER IN=5
C          10-15   IOUT - OUTPUT UNIT - IF 0 DEFAULTS TO PRINTER IOUT=6
C        TITLE CARD
C        CONTROL CARD
C        SOLID TABLE
C        REGION TABLE FOLLOWED BY -1 CARD
C        IDENT TABLE FOLLOWED BY BLANK CARD
C
C     UNIT IN  - INPUT OLD COM GEOM DESCRIPTION
C     UNIT IOUT- OUTPUT NEW COM GEOM DESCRIPTION (EDITED)
C     UNIT 10  - NEW REGION TABLE    (TEMPORARY - BINARY)
C     UNIT 11  - OLD SOLID TABLE     (TEMPORARY - BINARY)
C     UNIT 12  - OLD REGION TABLE    (TEMPORARY - BINARY)
C
C
      DIMENSION TITLE(18)
      DIMENSION RPP(18), SOL(18), ISOLID(2500)
      DIMENSION IOP(9), ISOL(9)
      DIMENSION KARD(11), IDENT(12,1000)
      EQUIVALENCE (SOL(2),SOLTYP)
      LOGICAL DELETE, PRNT
      DATA BOX,ARB /3HBOX,3HARB /                              BOX/ARB
      DATA ATE /4H8   /                                        ARB
      DATA ARS /3HARS/
      DATA BLANK / 3H   /
      DATA END / 3HEND /
C
    1 FORMAT(5X,2I5)
    2 FORMAT(1H1,10HUNIT IN = ,I4/
     1        1H ,10HUNIT OUT =,I4//)
   10 FORMAT(17A4,A2,I10)
   15 FORMAT(1H ,17A4,A2,I10)
   20 FORMAT(3I10,40X,I10)
   25 FORMAT(1H ,3I10,40X,I10)
   30 FORMAT(17A4,A2,2I5)
   31 FORMAT(I3,A3,16A4,2I5)
   32 FORMAT(I8,9(A2,I5))                                      BRLESC
   35 FORMAT(1H ,17A4,A2,2I5)
   36 FORMAT(1H ,I3,A3,16A4,2I5)
   40 FORMAT(I5,1X,9(A2,I5),1X,2I5)
   41 FORMAT(5X,1X,9(A2,I5),1X,2I5)
   42 FORMAT(I5,70X,I5)
   43 FORMAT(75X,I5)
   45 FORMAT(1H ,I5,1X,9(A2,I5),1X,2I5)
   46 FORMAT(1H ,5X,1X,9(A2,I5),1X,2I5)
   47 FORMAT(1H ,I5,70X,I5)
   48 FORMAT(1H ,75X,I5)
   50 FORMAT(3I10,10X,7A4,A2,2I5)
   55 FORMAT(1H ,3I10,10X,7A4,A2,2I5)
C
```

```
C          INITIALIZE
C
      READ 1 , IN , IOUT
      IF (IN.EQ.0) IN = 5
      IF (IOUT.EQ.0) IOUT = 6
      WRITE(6,2) IN,IOUT
      NCARD = 0
      INCCRD = 1
C     CALL DISC (10,200) $ CALL DISC (11,200) $ CALL DISC (12,200)      BRLESC
      REWIND 10
      REWIND 11
      REWIND 12
      IF (IN.NE.5) REWIND IN
      IF (IOUT.NE.6) REWIND IOUT
      PRNT=.FALSE.
      IF(IOUT.EQ.6) PRNT=.TRUE.
C     PRNT=.TRUE.                                                       BRLESC
C         CLEAR IDENT STORAGE
      DO 90 I=1,12
      DO 90 L=1,1000
   90 IDENT(I,L)=0
C         CLEAR SOLID TABLE
      DO 91 I=1,2500
   91 ISOLID(I)=0
C
C         READ AND WRITE TITLE CARD
C
      READ (IN,10) TITLE
      NCARD = NCARD + INCCRD
      IF(PRNT) WRITE(IOUT,15) TITLE, NCARD
      IF(.NOT.PRNT) WRITE(IOUT,10) TITLE, NCARD
C
C         READ CONTROL CARD
C
      READ (IN,20) NRPP, NSOL, NREGON
      NSOLID = NRPP + NSOL
C
C         READ SOLIDS AND STORE ON UNIT 11
C
      IF (NRPP.EQ.0) GOTO 101
      DO 100 I=1,NRPP
      READ (IN,30) RPP
      WRITE (11) RPP
  100 CONTINUE
  101 MSOL=0
  102 READ (IN,31) SOL
      IF (SOLTYP.EQ.BLANK) GOTO 103
      MSOL=MSOL+1
      IF (MSOL.GT.NSOL) GOTO 104
  103 WRITE (11) SOL
      GOTO 102
C 104 CALL SETCWD (4)                                                   BRLESC
  C      DECODE (80,32,SOL(1)) IREG, (IOP(I),ISOL(I),I=1,9)             BRLESC
  104 WRITE (10,31) SOL                                                 UNIVAC
      REWIND 10                                                         IBM
      READ  (10,40) IREG, (IOP(I),ISOL(I),I=1,9)                        AND
      REWIND 10                                                         CDC
      SOLTYP = END
      WRITE (11) SOL
C
```

14

```
C           READ REGIONS AND STORE ON UNIT 12
C
  110 WRITE (12) IREG,IOP,ISOL
      IF (IREG.LT.0) GOTO 111
      READ (IN,40) IREG, (IOP(I),ISOL(I),I=1,9)
      GOTO 110
C           CHECK FOR REGION RPP
  111 READ (IN,50) KARD
      IF (KARD(1).NE.0) GOTO 121
C
C           READ IDENT TABLE AND STORE IN ARRAY IDENT
C
  120 READ (IN,50) KARD
      IF (KARD(1).EQ.0) GOTO 200
  121 L=KARD(1)
      IDENT(1,L)=0
      IF (KARD(3).EQ.1) GOTO 120
      IF (KARD(2).EQ.999) GOTO 120
      DO 122 I=1,11
      IDENT(I,L) = KARD(I)
  122 CONTINUE
      IDENT(12,L)= KARD(1)
      GOTO 120
C
C           READ OLD REGION TABLE FROM UNIT 12
C           DELETE AIR 1
C           FLAG SOLIDS USED IN REGION DESCRIPTION
C           STORE NEW REGION TABLE ON UNIT 10
C
  200 NEWREG=0
      NREG=0
      REWIND 12
  210 READ (12) IREG,IOP,ISOL
      IF (IREG) 290,220,230
C           SAME REGION
  220 IF (DELETE) GOTO 210
      GOTO 250
C           NEW REGION
  230 NREG=NREG+1
      IF (IDENT(1,NREG).NE.0) GOTO 240
      DELETE = .TRUE.
      GOTO 210
C           KEEP THIS REGION
  240 DELETE = .FALSE.
      NEWREG = NEWREG + 1
      IDENT(1,NREG) = NEWREG
C           FLAG SOLIDS USED
  250 DO 251 I=1,9
      IF (ISOL(I).EQ.0) GOTO 251
      L = IABS (ISOL(I))
      ISOLID(L) = 1
  251 CONTINUE
C           STORE NEW REGION
      WRITE (10) NEWREG,IOP,ISOL,IREG
      GOTO 210
C           END OF REGIONS FLAG
  290 WRITE (10) IREG,IOP,ISOL,IREG
C
C           SET UP SOLIDS
C
```

15

```
          NEWSOL = 0
          DO 300 I=1,NSOLID
          IF (ISOLID(I).EQ.0) GOTO 300
          NEWSOL = NEWSOL + 1
          ISOLID(I) = NEWSOL
      300 CONTINUE
          NEWRPP = 0
          IF (NRPP.EQ.0) GOTO 310
          DO 301 I=1,NRPP
          IF (ISOLID(I).NE.0) NEWRPP=NEWRPP+1
      301 CONTINUE
C
C         WRITE NEW CONTROL CARD
C
      310 NEWSOL = NEWSOL - NEWRPP
          NCARD = NCARD + INCCRD
          IF(PRNT) WRITE(IOUT,25) NEWRPP,NEWSOL,NEWREG,NCARD
          IF(.NOT.PRNT) WRITE(IOUT,20) NEWRPP,NEWSOL,NEWREG,NCARD
C
C         WRITE NEW RPP CARDS
C
          REWIND 11
          IF (NRPP.EQ.0) GOTO 330
          DO 320 IRPP=1,NRPP
          READ (11) RPP
          IF (ISOLID(IRPP).EQ.0) GOTO 320
          NCARD = NCARD + INCCRD
          IF(PRNT) WRITE(IOUT,35) RPP,IRPP,NCARD
          IF(.NOT.PRNT) WRITE(IOUT,30) RPP,IRPP,NCARD
      320 CONTINUE
C
C         WRITE NEW SOLID TABLE
C
      330 NSOL=NRPP
      340 READ (11) SOL
          IF (SOLTYP.EQ.END) GOTO 400
          IF (SOLTYP.NE.BLANK) GOTO 350
C         SAME SOLID
          IF (DELETE) GOTO 340
          GOTO 370
C         NEW SOLID
      350 NSOL = NSOL + 1
          IF (ISOLID(NSOL).NE.0) GOTO 360
          DELETE = .TRUE.
          GOTO 340
C         KEEP THIS SOLID
      360 DELETE = .FALSE.
          NEWSOL = MOD( ISOLID(NSOL) , 1000 )
C         CHANGE 'MAGIC' ARS TO 'GIFT' ARS
          IF(SOLTYP.NE.ARS) GOTO 364
          DO 362 I=4,18
          IF(SOL(I).NE.BLANK) GOTO 370
      362 CONTINUE
          READ(11) SOL
          SOLTYP=ARS
          GOTO 370
C         CHECK BOX OR ARB FOR DEGENERATION TO AN RPP BODY
      364 IF(SOLTYP.NE.BOX) GOTO 365
          CALL CKBOX (SOL,NEWSOL,NCARD,INCCRD,NSOL,IOUT,PRNT)
          GOTO 340
```

16

```
    365 IF(SOLTYP.NE.ARB) GOTO 370
        IR(SOL(3).NE.ATE.AND.SOL(3).NE.BLANK) GOTO 370
        CALL CKARB (SOL,NEWSOL,NCARD,INCCRD,NSOL,IOUT,PRNT)
        GOTO 340
C           WRITE NEW SOLID
    370 NCARD = NCARD + INCCRD
        IF(PRNT) WRITE(IOUT,36) NEWSOL,(SOL(I),I=2,18),NSOL,NCARD
        IR(.NOT.PRNT) WRITE(IOUT,31) NEWSOL,(SOL(I),I=2,1B),NSOL,NCARD
        GOTO 340
C
C           WRITE NEW REGION TABLE
C
    400 REWIND 13
    410 READ (10) NEWREG,IOP,ISOL,IREG
        IF (NEWREG.LT.0) GOTO 490
        DO 420 I=1,9
        IF (ISOL(I).EQ.0) GOTO 420
        L = IABS (ISOL(I))
        ISOL(I) = ISIGN (ISOLID(L),ISOL(I))
    420 CONTINUE
        NCARD = NCARC + INCCRD
        IF (IREG.EQ.0) GOTO 43C
        NREG = IREG
        IF(PRNT) WRITE(IOUT,45) NEWREG,(IOP(I),ISOL(I),I=1,9),NREG,NCARD
        IF(.NOT.PRNT) WRITE(IOUT,40)NEWREG,(IOP(I),ISOL(I),I=1,9),NREG,
       1                            NCARD
        GOTO 410
    430 IF(PRNT) WRITE(IOUT,46)(IOP(I),ISOL(I),I=1,9),NREG,NCARD
        IF(.NOT.PRNT) WRITE(IOUT,46)(IOP(I),ISOL(I),I=1,9),NREG,NCARD
        GOTO 410
C           END OF REGION FLAG
    490 NCARD = NCARC + INCCRD
        IF(PRNT) WRITE(IOUT,47) NEWREG,NCARD
        IF(.NOT.PRNT) WRITE(IOUT,42) NEWREG,NCARD
C           BLANK CARD FOR REGION RPP
        NCARD = NCARC + INCCRD
        IF(PRNT) WRITE(IOUT,48) NCARD
        IF(.NOT.PRNT) WRITE(IOUT,43) NCARD
C
C           WRITE NEW IDENT TABLE
C
        DO 500 L=1,NREGON
        IF (IDENT(1,L).EQ.0) GOTO 500
        NCARD = NCARD + INCCRD
        IR(PRNT) WRITE(IOUT,55) (IDENT(I,L),I=1,12),NCARD
        IF(.NOT.PRNT) WRITE(IOUT,50)(IDENT(I,L),I=1,12),NCARD
    500 CONTINUE
C           END OF TABLE FLAG
        NCARD = NCARC + INCCRD
        IF(PRNT) WRITE(IOUT,48) NCARD
        IF(.NOT.PRNT) WRITE(IOUT,43) NCARD
C
C           LIST SOLIDS DELETED
C
        NSOL = 0
        DO 1000 I=1,NSOLID
        IR (ISOLID(I).NE.0) GOTO 1000
        NSOL = NSOL + 1
        ISOLID(NSOL) = I
   1000 CONTINUE
```

17

```
      PRINT 1001 , NSOL
      IF (NSOL.NE.0) PRINT 1002 , (ISOLID(I),I=1,NSOL)
C
 1001 FORMAT(1H1,'NUMBER OF SOLIDS DELETED',I5 )
 1002 FORMAT(1H ,10I5)
C
C         LIST REGIONS DELETED
C
      NREG = 0
      DO 2000 I=1,NREGON
      IF (IDENT(1,I).NE.0) GOTO 2000
      NREG = NREG + 1
      ISOLID(NREG) = I
 2000 CONTINUE
      PRINT 2001 , NREG
      PRINT 2002 , (ISOLID(I),I=1,NREG)
C
 2001 FORMAT(1H0,'NUMBER OF REGIONS DELETED', I5 )
 2002 FORMAT(1H ,10I5)
C
      STOP
      END


      SUBROUTINE CKARB(SOL,NEWSOL,NCARD,INCCRD,NSOL,IOUT,PRNT)
C
C     THIS SUBROUTINE CHANGES AN ARB TO A RPP
C
      DOUBLE PRECISION X,Y,Z,A,B,C
      DIMENSION SOL(18),X(8),Y(8),Z(8),R(6),IV(4,6),A(6),B(6),C(6)
      DIMENSION TEMP(10)                                              UNIV/CDC
      LOGICAL PRNT
      DATA ARB /3HARB/
      DATA ATE /4H8   /
      DATA BLANK /4H    /
      DATA RPP /3HRPP/
      DATA IV / 1,2,3,4, 5,6,7,8, 1,5,8,4, 2,3,7,6, 1,2,6,5, 4,3,7,8/
    1 FORMAT(2A3,16A4)
    2 FORMAT(6F10.0)
    3 FORMAT(10X,6F10.0)
    4 FORMAT(1H ,I3,A3,A4,6F10.4,2I5)
    5 FORMAT(1H ,I3,7X,6F10.4,2I5)
    6 FORMAT(5H ARB ,I3,29H HAS BEEN CONVERTED TO A RPP.)
    7 FORMAT(6(1X,4I1))
    8 FORMAT(10X,6(1X,4I1))
    9 FORMAT(15A4)
   10 FORMAT(1H ,I3,7X,6(1X,4I1),30X,2I5)
   11 FORMAT(I3,A3,A4,6F10.4,2I5)
   12 FORMAT(I3,7X,6F10.4,2I5)
   13 FORMAT(I3,7X,6(1X,4I1),30X,2I5)
      TOL=.0001
      HSOL=SOL(3)
C         CONVERT TO FLOATING POINT FORMAT
C     REWIND 12                                                        IBM
      DO 100 I=1,8,2
      ENCODE(60,9,TEMP(1))(SOL(J),J=4,18)                              UNIVAC
      DECODE(60,2,TEMP(1)) X(I),Y(I),Z(I),X(I+1),Y(I+1),Z(I+1)          AND CDC
C     DECODE(60,2,SOL(4)) X(I),Y(I),Z(I),X(I+1),Y(I+1),Z(I+1)         BRLESC
C     WRITE(12,1) SOL                                                 IBM
  100 IF(N.NE.4.OR.HSOL.NE.ATE) READ(11) SOL
```

```
C       IF(HSOL.EQ.BLANK) WRITE(12,1) SOL                                    IBM
C       RBWIND 12                                                            IBM
C       DO 101 I=1,8,2                                                       IBM
C 101 READ(12,3) X(I),Y(I),Z(I),X(I+1),Y(I+1),Z(I+1)                         IBM
C       IF(HSOL.EQ.BLANK) READ(12,8) IV                                      IBM
C       IF(HSOL.EQ.BLANK) DECODE(30,7,SOL(4)) IV                             BRLESC
        IF(HSOL.EQ.ATE) GOTO 110                                             UNIVAC
        ENCODE(32,9,TEMP(1))(SOL(J),J=4,11)
        DECODE(30,7,TEMP(1))IV                                               CDC
C           FIND EQUATION OF FACES, TEST FOR RPP
  110 NZ=0
        DO 120 I=1,6
        CALL EQFACE (AP,BP,CP,X(L),Y(L),Z(L),1,2,3)
        IF(ABS(A(I)).LE.TOL) NZ=NZ+1
        IF(ABS(8(I)).LE.TOL) NZ=NZ+1
  120 IF(ABS(C(I)).LE.TOL) NZ=NZ+1
        IF(NZ.EQ.12) GOTO 200
C           FAILED, REMAINED AN ARB
        NCARD=NCARD+INCCRD
        IF(PRNT)WRITE(IOUT,4)NEWSOL,ARB,HSOL,(X(I),Y(I),Z(I),I=1,2),NSOL,
     1                 NCARD
        IF(.NOT.PRNT) WRITE(IOUT,11)NEWSOL,ARB,HSOL,(X(I),Y(I),Z(I),I=1,2)
     1                              ,NSOL,NCARD
        DO 130 I=3,8,2
        NCARD=NCARD+INCCRD
        IF(PRNT)WRITE(IOUT,5)NEWSOL,X(I),Y(I),Z(I),X(I+1),Y(I+1),Z(I+1),
     1                 NSOL,NCARD
        IF(.NOT.PRNT)WRITE(IOUT,12)NEWSOL,X(I),Y(I),Z(I),X(I+1),Y(I+1),
     1                              Z(I+1),NSOL,NCARD
  130 CONTINUE
        IF(HSOL.EQ.ATE) RETURN
        NCARD=NCARD+INCCRD
        IF(PRNT)WRITE(IOUT,10) NEWSOL,IV,NSOL,NCARD
        IF(.NOT.PRNT) WRITE(IOUT,13) NEWSOL,IV,NSOL,NCARD
        RETURN
C           CONVERT TO RPP
  200 DO 210 I=2,8
        IF(X(I).NE.X(1))X(2)=X(I)
        IF(Y(I).NE.Y(1))Y(2)=Y(I)
  210 IF(Z(I).NE.Z(1))Z(2)=Z(I)
        R(1)=AMIN1(X(1),X(2))
        R(2)=AMAX1(X(1),X(2))
        R(3)=AMIN1(Y(1),Y(2))
        R(4)=AMAX1(Y(1),Y(2))
        R(5)=AMIN1(Z(1),Z(2))
        R(6)=AMAX1(Z(1),Z(2))
        NCARD=NCARD+INCCRD
        IF(PRNT)WRITE(IOUT,4) NEWSOL,RPP,BLANK,R,NSOL,NCARD
        IF(.NOT.PRNT) WRITE(IOUT,11) NEWSOL,RPP,BLANK,R,NSOL,NCARD
        WRITE(6,6) NSOL
        RETURN
        END


        SUBROUTINE CKBOX (SOL,NEWSOL,NCARD,INCCRD,NSOL,IOUT,PRNT)
C
C       THIS SUBROUTINE CONVERTS A BOX TO A RPP
C
        DIMENSION SOL(18),B(12),TEMP(10),R(6)
        LOGICAL PRNT
```

19

```
      DATA BOX /3HBOX/
      DATA RPP /3HRPP/
    1 FORMAT(2A3,16A4)
    2 FORMAT(6F10.0)
    3 FORMAT(10X,6F10.0)
    4 FORMAT(1H ,I3,A3,4X,6F10.4,2I5)
    5 FORMAT(1H ,I3,7X,6F10.4,2I5)
    6 FORMAT(5H BOX ,I3,29H HAS BEEN CONVERTED TO A RPP.)
    7 FORMAT(15A4)
    8 FORMAT(I3,A3,4X,6F10.4,2I5)
    9 FORMAT(I3,7X,6F10.4,2I5)
C          CONVERT TO FLOATING POINT FORMAT
      ENCODE(60,7,TEMP(1))(SOL(I),I=4,18)              UNIVAC
      DECODE(60,2,TEMP(1))(B(I),I=1,6)                  AND CDC
C     DECODE(60,2,SOL(4))(B(I),I=1,6)                  BRLESC
C     REWIND 12                                        IBM
C     WRITE(12,1) SOL                                  IBM
      READ(11) SOL
       ENCODE(60,7,TEMP(1))(SOL(I),I=4,18)             UNIVAC
      DECODE(60,2,TEMP(1))(B(I),I=7,12)                 AND CDC
C     DECODE(60,2,SOL(4))(B(I),I=7,12)                 BRLESC
C     WRITE(12,1) SOL                                  IBM
C     REWIND 12                                        IBM
C     READ(12,3) B                                     IBM
C          CHECK FOR RPP
      NZ=0
      DO 100 I=4,12
  100 IF(B(I).EQ.0.0) NZ=NZ+1
      IF(NZ.EQ.6) GOTO 200
C          FAILED, REMAINS A BOX
      NCARD=NCARD+INCCRD
      IF(PRNT) WRITE(IOUT,4) NEWSOL,BOX,(B(I),I=1,6),NSOL,NCARD
      IF(.NOT.PRNT) WRITE(IOUT,8) NEWSOL,BOX,(B(I),I=1,6),NSOL,NCARD
      NCARD=NCARD+INCCRD
      IF(PRNT) WRITE(IOUT,5) NEWSOL,(B(I),I=7,12),NSOL,NCARD
      IF(.NOT.PRNT) WRITE(IOUT,9) NEWSOL,(B(I),I=7,12),NSOL,NCARD
      RETURN
C          CONVERT BOX TO RPP
  200 B(4)=B(1)+B(4)+B(7)+B(10)
      B(5)=B(2)+B(5)+B(8)+B(11)
      B(6)=B(3)+B(6)+B(9)+B(12)
      R(1)=AMIN1(B(1),B(4))
      R(2)=AMAX1(B(1),B(4))
      R(3)=AMIN1(B(2),B(5))
      R(4)=AMAX1(B(2),B(5))
      R(5)=AMIN1(B(3),B(6))
      R(6)=AMAX1(B(3),B(6))
      NCARD=NCARD+INCCRD
      IF(PRNT) WRITE(IOUT,4) NEWSOL,RPP,R,NSOL,NCARD
      IF(.NOT.PRNT) WRITE(IOUT,8) NEWSOL,RPP,R,NSOL,NCARD
      WRITE(6,6) NSOL
      RETURN
      END



      SUBROUTINE EQFACE (X,Y,Z,A,B,C,K,L,M)
C
C     THIS SUBROUTINE CALCULATES A,B,C OF THE EQUATION OF FACE AX+BY+CZ=1.0
C     IT ALSO CALCULATES THE POINT OF INTERSECT OF THREE PLANES
C
```

```
      DOUBLE PRECISION A,B,C,D,X,Y,Z
      CIMENSION X(8),Y(8),Z(8)
      D=X(K)*Y(L)*Z(M)+X(M)*Y(K)*Z(L)+X(L)*Y(M)*Z(K)-X(M)*Y(L)*Z(K)-X(L)
     1*Y(K)*Z(M)-X(K)*Y(M)*Z(L)
      IF(D.EQ.0.0)  D=.00001
      A=(Y(K)*(Z(L)-Z(M))+Y(L)*(Z(M)-Z(K))+Y(M)*(Z(K)-Z(L)))/D
      B=(Z(K)*(X(L)-X(M))+Z(L)*(X(M)-X(K))+Z(M)*(X(K)-X(L)))/D
      C=(X(K)*(Y(L)-Y(M))+X(L)*(Y(M)-Y(K))+X(M)*(Y(K)-Y(L)))/D
      RETURN
      END
```

Appendix B: A Sample Input for Code

I/O		5	6					
SAMPLE INPUT USED IN NWC DOCTUMENTATICN								
		1		24		12		
-10000.		10000.		-10000.		10000.	-10000.	10000.
2	BOX	75.	-36.	12.	-150.	0.	0.	BODY
2		0.	72.	0.	0.	0.	36.	
3	BOX	74.	-35.	13.	-148.	0.	0.	(1.0)
3		0.	70.	0.	0.	0.	34.	
4	ARB	75.	-36.	12.	75.	36.	12.	FRONT
4		75.	36.	48.	75.	-36.	48.	
4		100.	0.	12.	100.	0.	12.	
4		100.	0.	12.	100.	0.	12.	
4		1234	6435	6128	6237	7415	7415	
5	ARB	-75.	-36.	12.	-75.	36.	12.	REAR
5		-75.	36.	48.	-75.	-36.	48.	
5		-100.	-24.	12.	-100.	24.	12.	
5		-100.	24.	20.	-100.	-24.	20.	
5		1234	5678	3487	1265	2376	1485	
6	ELL	20.	0.	48.	-20.	0.	48.	BUBBLE
6		50.						
7	ELL 7	0.	0.	48.	24.	0.	0.	(1.0)
7		14.						
8	RCC	60.	-36.	12.	-0.	8.	0.	WHEEL
8		12.						
9	RCC	60.	36.	12.	0.	-8.	0.	WHEEL
9		12.						
10	RCC	-60.	-36.	12.	0.	8.	0.	WHEEL
10		12.						
11	RCC	-60.	36.	12.	C.	-8.	u.	WHEEL
11		12.						
12	BOX	-70.	-20.	15.	40.	0.	C.	ENGINE
12		0.	40.	0.	0.	0.	30.	
13	RAW	-70.	-20.	45.	0.	0.	-10.	(ENGINE)
13		0.	10.	0.	40.	0.	0.	
14	RAW	-70.	20.	45.	0.	0.	-10.	(ENGINE)
14		0.	-10.	0.	40.	0.	C.	
15	ARB	-70.	-10.	45.	-70.	10.	45.	(ENGINE)
15		-70.	0.	35.	-7C.	0.	35.	
15		-30.	-10.	45.	-30.	10.	45.	
15		-30.	0.	35.	-30.	0.	35.	
15		3124	7658	1375	2376	1265	1265	
16	ARS							
16			4		5			
16		-70.	-20.	15.	-70.	-20.	15.	1
16		-70.	-20.	15.	-70.	-20.	15.	2
16		-70.	-20.	15.				3
16		-70.	-20.	15.	-70.	-10.	15.	4
16		-70.	-10.	25.	-70.	-20.	35.	5
16		-70.	-20.	15.				6
16		-30.	-20.	15.	-30.	-10.	15.	7
16		-30.	-10.	25.	-30.	-20.	35.	8
16		-30.	-20.	15.				9
16		-30.	-20.	15.	-30.	-20.	15.	10
16		-30.	-20.	15.	-30.	-20.	15.	11
16		-30.	-20.	15.				12
17	ARS							
17			5		4			
17		-70.	20.	15.	-70.	20.	15.	1
17		-30.	20.	15.	-30.	20.	15.	2

23

```
17          -7G.      20.      15.      -70.      10.      15.                  3
17          -30.      10.      15.      -30.      20.      15.                  4
17          -70.      20.      15.      -70.      10.      25.                  5
17          -30.      10.      25.      -30.      20.      15.                  6
17          -70.      20.      15.      -70.      20.      35.                  7
17          -30.      20.      35.      -30.      20.      15.                  8
17          -70.      20.      15.      -70.      20.      15.                  9
17          -30.      20.      15.      -30.      20.      15.              10      .
18  REC     0.        0.       24.      0.        C.       28.      TRUNK
18          0.        7.5      0.       5.        0.       0.
19  SPH     0.        0.       52.      5.                          HEAD
20  TEC     0.        -7.5     49.      20.       0.       -12.     ARM
20          0.        0.       3.       0.        2.       0.
20          2.
21  TEC     0.        7.5      49.      20.       0.       -12.     ARM
21          0.        0.       3.       0.        2.       0.
21          2.
22  TRC     -2.       -4.5     27.      32.       0.       -12.     LEG
22          3.        2.
23  TRC     -2.       4.5      27.      32.       0.       -12.     LEG
23          3.        2.
24  TOR     21.5      C.       37.      1.        0.       C.       STEERING
24          8.        1.                                            WHEEL
25  ARB     21.5      -6.      33.5     21.5      6.       33.5     CENTER
25          21.5      0.       44.      40.       0.       37.      STEERING
25          21.5      -6.      33.5     21.5      6.       33.5     WHEEL
25          21.5      0.       44.      40.       0.       37.
25          3127 2146 4328 1345 3127 3127
        1         1     -2     -4     -5     -6     -8     -9    -10    -11
        2 OR      2     -3     -7     -8     -9    -10   -11CR    4OR    5
        3         6     -7     -2
        4         8
        5         9
        6        10
        7        11
        8 OR      3    -18    -19    -20    -21    -22    -23    -24    -25
                 -8     -9    -10    -11   -12CR     7    -18    -19    -20
                -21    -24   -250R   130R   140R   150R   16CR    17
        9         3     12    -13    -14    -15    -16    -17
       10 OR    180R   190R   200R   210R   220R    23
       11         3     24    -25
       12         3     25
       -1
                1                01          OUTSIDE AIR
                2       100                  BODY
                3       101                  BUBBLE
                4       151                  WHEEL RIGHT FRONT
                5       152                  WHEEL LEFT FRONT
                6       153                  WHEEL RIGHT REAR
                7       154                  WHEEL LEFT REAR
                8                02          AIR INSIDE
                9       200                  ENGINE
               10       300                  MAN
               11       400                  STEERING WHEEL
               12       401                  STEERING SHAFT
```

<<

```
UNIT IN =    5
UNIT OUT =   6


SAMPLE INPUT USED IN NWC DOCTUMENTATION                                          1
            0        24          11                                              2
   1RPP      -75.0000    75.0000   -36.0000    36.0000    12.0000    48.0000   2  3
BOX   2 HAS BEEN CONVERTED TO A RPP.
   2RPP      -74.0000    74.0000   -35.0000    35.0000    13.0000    47.0000   3  4
BOX   3 HAS BEEN CONVERTED TO A RPP.
   3ARB       75.0000   -36.0000    12.0000    75.0000    36.0000    12.8000   4  5
   3           75.0000    36.0000    48.0000    75.0000   -36.0000    48.0000   4  6
   3          100.0000     0.0000    12.0000   100.0000     0.0000    12.0000   4  7
   3          100.0000     0.0000    12.0000   100.0000     0.0000    12.0000   4  8
   3          1234 6435 6128 6237 7415 7415                                    4  9
   4ARB      -75.0000   -36.0000    12.0000   -75.0000    36.0000    12.0000   5 10
   4          -75.0000    36.0000    48.0000   -75.0000   -36.0000    48.0000   5 11
   4         -100.0000   -24.0000    12.0000  -100.0000    24.0000    12.0000   5 12
   4         -100.0000    24.0000    20.0000  -100.0000   -24.0000    20.0000   5 13
   4          1234 5678 3487 1265 2376 1485                                    5 14
   5ELL       20.         0.        48.       -20.         0.        48.       6 15
   5          50.                                                              6 16
   6ELL   7    0.         0.        48.        24.         0.         0.        7 17
   6          14.                                                              7 18
   7RCC       60.       -36.        12.        -0.         8.         0.        8 19
   7          12.                                                              8 20
   8RCC       60.        36.        12.         0.        -8.         0.        9 21
   8          12.                                                              9 22
   9RCC      -60.       -36.        12.         0.         8.         0.       10 23
   9          12.                                                             10 24
  10RCC      -60.        36.        12.         0.        -8.         0.       11 25
  10          12.                                                             11 26
  11RPP      -70.0000   -30.0000   -20.0000    20.0000    15.0000    45.0000  12 27
BOX  12 HAS BEEN CONVERTED TO A RPP.
  12RAW      -70.       -20.        45.         0.         0.       -10.       13 28
  12           0.        10.         0.        40.         0.         0.        13 29
  13RAW      -70.        20.        45.         0.         0.       -10.       14 30
  13           0.       -10.         0.        40.         0.         0.        14 31
  14ARB      -70.0000   -10.0000    45.0000   -70.0000    10.0000    45.0000  15 32
  14         -70.0000     0.0000    35.0000   -70.0000     0.0000    35.0000  15 33
  14         -30.0000   -10.0000    45.0000   -30.0000    10.0000    45.0000  15 34
  14         -30.0000     0.0000    35.0000   -30.0000     0.0000    35.0000  15 35
  14          3124 7658 1375 2376 1265 1265                                   15 36
  15ARS               4         5                                             16 37
  15         -70.       -20.        15.       -70.       -20.        15.       16 38
  15         -70.       -20.        15.       -70.       -20.        15.       16 39
  15         -70.       -20.        15.                                        16 40
  15         -70.       -20.        15.       -70.       -10.        15.       16 41
  15         -70.       -10.        25.       -70.       -20.        35.       16 42
  15         -70.       -20.        15.                                        16 43
  15         -30.       -20.        15.       -30.       -10.        15.       16 44
  15         -30.       -10.        25.       -30.       -20.        35.       16 45
  15         -30.       -20.        15.                                        16 46
  15         -30.       -20.        15.       -30.       -20.        15.       16 47
  15         -30.       -20.        15.       -30.       -20.        15.       16 48
  15         -30.       -20.        15.                                        16 49
  16ARS               5         4                                             17 50
  16         -70.        20.        15.       -70.        20.        15.       17 51
  16         -30.        20.        15.       -30.        20.        15.       17 52
  16         -70.        20.        15.       -70.        10.        15.       17 53
```

16	-30.	10.	15.	-30.	20.	15.	17	54
16	-70.	20.	15.	-70.	10.	25.	17	55
16	-30.	10.	25.	-30.	20.	15.	17	56
16	-70.	20.	15.	-70.	20.	35.	17	57
16	-30.	20.	35.	-30.	20.	15.	17	58
16	-70.	20.	15.	-70.	20.	15.	17	59
16	-30.	20.	15.	-30.	20.	15.	17	60
17REC	0.	0.	24.	0.	0.	28.	18	61
17	0.	7.5	0.	5.	0.	0.	18	62
18SPH	0.	0.	52.	5.			19	63
19TEC	0.	-7.5	49.	20.	0.	-12.	20	64
19	0.	0.	3.	0.	2.	0.	20	65
19	2.						20	66
20TEC	0.	7.5	49.	20.	0.	-12.	21	67
20	0.	0.	3.	0.	2.	0.	21	68
20	2.						21	69
21TRC	-2.	-4.5	27.	32.	0.	-12.	22	70
21	3.	2.					22	71
22TRC	-2.	4.5	27.	32.	0.	-12.	23	72
22	3.	2.					23	73
23TOR	21.5	0.	37.	1.	0.	0.	24	74
23	8.	1.					24	75
24ARB	21.5000	-6.0000	33.5000	21.5000	6.0000	33.5000	25	76
24	21.5000	0.0000	44.0000	40.0000	0.0000	37.0000	25	77
24	21.5000	-6.0000	33.5000	21.5000	6.0000	33.5000	25	78
24	21.5000	0.0000	44.0000	40.0000	0.0000	37.0000	25	79
24	3127	2146	4328 1345	3127 3127			25	80
1 OR	1	-2	-6	-7	-8	-9	-100R	30R	4	2	81
2	5	-6	-1	0	0	0	0	0	0	3	82
3	7	0	0	0	0	0	0	0	0	4	83
4	8	0	0	0	0	0	0	0	0	5	84
5	9	0	0	0	0	0	0	0	0	6	85
6	10	0	0	0	0	0	0	0	0	7	86
7 OR	2	-17	-18	-19	-20	-21	-22	-23	-24	8	87
	-7	-8	-9	-10	-110R	6	-17	-18	-19	8	88
	-20	-23	-240R	120R	130R	140R	150R	16	0	8	89
8	2	11	-12	-13	-14	-15	-16	0	0	9	90
9 OR	170R	180R	190R	200R	210R	22	0	0	0	10	91
10	2	23	-24	0	0	0	0	0	0	11	92
11	2	24	0	0	0	0	0	0	0	12	93
-1											94
											95
	1	100	0	BODY			2	96
	2	101	0	BUBBLE			3	97
	3	151	0	WHEEL RIGHT FRONT			4	98
	4	152	0	WHEEL LEFT FRONT			5	99
	5	153	0	WHEEL RIGHT REAR			6	100
	6	154	0	WHEEL LEFT REAR			7	101
	7	0	2	AIR INSIDE			8	102
	8	200	0	ENGINE			9	103
	9	300	0	MAN			10	104
	10	400	0	STEERING WHEEL			11	105
	11	401	0	STEERING SHAFT			12	106
								107

NUMBER OF SOLIDS DELETED   1
        1

NUMBER OF REGIONS DELETED   1
        1

DISTRIBUTION LIST

No. of Copies	Organization	No. of Copies	Organization
2	Commander Defense Documentation Center ATTN: DDC-TCA Cameron Station Alexandria, VA 22314	1	Commander US Army Materiel Command ATTN: AMCRD-T 5001 Eisenhower Avenue Alexandria, VA 22333
3	Director Defense Advanced Research Projects Agency ATTN: Tech Info Cen 1400 Wilson Boulevard Arlington, VA 22209	1	Commander US Army Materiel Command ATTN: AMCRD-R 5001 Eisenhower Avenue Alexandria, VA 22333
1	Chairman Defense Science Board Washington, DC 20315	1	Commander US Army Materiel Command ATTN: AMCRD-K, B. Chasnov 5001 Eisenhower Avenue Alexandria, VA 22333
1	Director Institute for Defense Analyses 400 Army-Navy Drive Arlington, VA 22202	1	Commander US Army Materiel Command ATTN: AMCPA 5001 Eisenhower Avenue Alexandria, VA 22333
1	Director Defense Intelligence Agency ATTN: DI-7E, Mr. R. Sauer Washington, DC 20301	1	Commander US Army Materiel Command ATTN: AMCRD-WN, J. Gensior 5001 Eisenhower Avenue Alexandria, VA 22333
1	Commander US Army Materiel Command ATTN: AMCDMA-ST 5001 Eisenhower Avenue Alexandria, VA 22333	1	Commander US Army Materiel Command ATTN: AMCRD-M, J. Youmans 5001 Eisenhower Avenue Alexandria, VA 22333
1	Commander US Army Materiel Command ATTN: AMCRD, BG H.A. Griffith 5001 Eisenhower Avenue Alexandria, VA 22333	1	Commander US Army Materiel Command ATTN: AMCRD-MT, R. Hall 5001 Eisenhower Avenue Alexandria, VA 22333

DISTRIBUTION LIST

No. of Copies	Organization	No. of Copies	Organization
1	Commander US Army Aviation Systems Command ATTN: AMSAV-E 12th & Spruce Streets St. Louis, MO 63166	1	Chief, Office of Missile Electronics Warfare ATTN: AMSEL-WL-ML White Sands Missile Range, NM 88002
1	Director US Army Air Mobility Research and Development Laboratory Ames Research Center ATTN: COL J. Geary Moffett Field, CA 94035	4	Director Night Vision Laboratory ATTN: AMSEL-NV, J. Moulton Mr. J. Johnson AMSEL-NV-SD, Mr. T. Jordan Mr. R. Spande Fort Belvoir, VA 22060
2	Director US Army Air Mobility Research and Development Laboratory ATTN: SAVDL-EU-MOS, E. V. Merritt Mr. L. Hewin Fort Eustis, VA 23604	4	Director Night Vision Laboratory ATTN: AMSEL-NV-VI, F. Zegel Mr. S. Rodak Mr. F. Shields Dr. Vatsia Fort Belvoir, VA 22060
6	Commander US Army Electronics Command ATTN: AMSEL-RD, Dr. R. Wiseman Dr. E. Collett AMSEL-IO AMSEL-VL AMSEL-NL AMSEL-WL Fort Monmouth, NJ 07703	5	Commander US Army Missile Command ATTN: AMSMI-R, W. Pittman AMSMI-RB, Dr. J. Kobler AMSMI-RFM, COL Funke AMSMI-REI, H. Jackson AMCPM-HF, Mr. N. Mangus Redstone Arsenal, AL 35809
2	Director R&D Technical Support Activity ATTN: AMSEL-GG-E, Mr. C. Goldy US Army Electronics Command Fort Monmouth, NJ 07703	5	Commander US Army Missile Command ATTN: AMSMI-RE, R. Farmer AMSMI-REO, B. Sitton (3 cys) AMSMI-REP, W. McKnight Redstone Arsenal, AL 35809
3	Commander/Director Atmospheric Sciences Laboratory US Army Electronics Command ATTN: AMSEL-BL-AS, Dr. H. Holt Mr. R. Gomez Mr. J. Mason White Sands Missile Range, NM 88002	2	Commander US Army Missile Command ATTN: AMSMI-RDP, J. M. Brown Mr. T. Summers Redstone Arsenal, AL 35809

DISTRIBUTION LIST

No. of Copies	Organization	No. of Copies	Organization

6	Commander
	US Army Tank-Automotive Command
	ATTN: AMSTA-RHFL
	        AMSTA-RGD, O. Renius
	        AMSTA-Z, Mr. D. Wilburn
	        AMSTA-R
	        AMSTA-REMA, Mr. V. Pagano
	            Mr. S. Tasdemiroglu
	Warren, MI 48090
		3	Commander
			US Army Rock Island Arsenal
			ATTN: SARRI-LR, J. W. McGarvar
			            B. E. Morris
			        SARRI-LA, Mr. B. Moody
			Rock Island, IL 61201

6	Commander
	US Army Mobility Equipment
	  Research & Development Center
	ATTN: Tech Docu Cen, Bldg 315
	        AMSME-RZT
	        SMEFB-MC, Mr. D. Gee
	        SMEFB-MB, J. Hopkins
	            Mr. A. Perri
	            Mr. L. Long
	Fort Belvoir, VA 22060
		2	Commander
			US Army Watervliet Arsenal
			ATTN: SARWV-RDD-AT,
			            Mr. R. Thierry
			        SARWV-RDR-C,
			            Mr. D. Priest
			Watervliet, NY 12189

2	Commander
	US Army Armament Command
	ATTN: AMSAR-RDT, J. Turkeltaub
	            Dr. E. Haug
	Rock Island, IL 61202
		1	Commander
			US Army White Sands Missile
			  Range
			ATTN: STEWS-TE-AG,
			            Mr. T. Werneking,
			            Bldg 1676
			White Sands Missile Range, NM
			88002

1	Commander
	US Army Frankford Arsenal
	ATTN: SARFA-FCW-W,
	            H. Zandberg
	Philadelphia, PA 19137
		1	Commander
			US Army Harry Diamond
			  Laboratories
			ATTN: AMXDO-TI
			2800 Powder Mill Road
			Adelphi, MD 20783

4	Commander
	US Army Picatinny Arsenal
	ATTN: SARPA-AD-C, J. Killen
	            E. Lacher
	            T. Ricciardi
	        SARPA-DW6, S. Einbinder
	Dover, NJ 07801
		1	Commander
			US Army Engineer Waterways
			  Experiment Station
			Vicksburg, MS 39180

		1	Commander Naval Air Development Center ATTN: SAED/SDE/Mr. M. Mitchell Warminster, PA 18974
		1	Commander US Naval Missile Center Code 5110, Mr. B. Nofrey Point Mugu, CA 93042

DISTRIBUTION LIST

No. of Copies	Organization	No. of Copies	Organization

2	Commander/Director
	US Naval Ship Research and
	  Development Center
	ATTN: Code 1741, J. W. Sykes
	        Code 1749, Dr. F. Fisch
	Washington, DC 20007
		3	AFATL (DLRV, Mr. R. McGuire,
			  Mr. J. Flint, Mr. R. Griner)
			Eglin AFB, FL 32542

		1	AFATL (DLRD, Mr. J. Collins) Eglin AFB, FL 32542

5	Commander
	US Naval Surface Weapons Center
	ATTN: Code 433, Mr. R. Craig
	        Code GAV, Mr. J. Logan
	        Code GAV, J. Nelson
	        Code GAV, Mr. W. Hooks
	        Code Mal, Tech Lib
	Silver Spring, MD 20910
		1	AFATL (DLYW, Mr. M. Adams)
			Eglin AFB, FL 32542

		3	ASD (SRHD, Mr. G. Bennett;
			  ENYS, Mr. J. Howard;
			  ADDP, Mr. R. Hilbrand)
			Wright-Patterson AFB, OH 45433

3	Commander
	US Naval Surface Weapons Center
	ATTN: Code GA, Mr. T. H. McCants
	        Code GA, Mr. W. D. Ralph
	        Code GA, Mr. J. R. Rech
	Dalgren, VA 22448
		1	Armament Systems Incorporated
			ATTN: Mr. D. Watson
			1695 W. Crescent Avenue
			Anaheim, CA 92801

		1	Falcon Research & Development ATTN: Mr. R. K. Miller 1225 South Huron Denver, CO 80223

5	Commander
	US Naval Weapons Center
	ATTN: Code 40701, Mr. M. Keith
	        Code 4565, C. B. Sandburg
	        Code 4071, Mr. Galloway
	          Mr. A. S. Gould, Jr.
	        Code 4565, Mr. H. Drake
	China Lake, CA 93555
		1	OSU
			ATTN: Mr. G. Spradling
			P. O. Box 1925
			Eglin AFB, FL 32542

		1	Quest Research Corporation ATTN: Mr. J. Alcott Suite 407 6845 Elm Street McLean, VA 22101
1	Commander US Naval Operational Test and Evaluation Force US Naval Base Norfolk, VA 23511	1	Value Engineering Incorporated ATTN: Mr. J. Murphy 2550 Huntington Avenue Alexandria, VA 22303

3	Director
	US Naval Research Laboratory
	Anacostia Station
	ATTN: Code 6214,
	        Mr. W. J. Furgusun
	        Code 7785, Mr. J. R. Baker
	        Tech Info Center
	Washington, DC 20375
		1	Denver Research Institute
			ATTN: Mr. R. Recht
			Denver, CO 80210

DISTRIBUTION LIST

No. of
Copies   Organization

  2   Southwest Research Institute
      ATTN: Dr. E. Baker
             Mr. R. L. Bessey
      Department of Mechanical Sciences
      8500 Culebra Road
      P. O. Drawer 28510
      San Antonio, TX 78284

      Aberdeen Proving Ground

      Marine Corps Ln Ofc

      Dir, USAMSAA
        ATTN: AMXSY-D, J. Sperrazza
               AMXSY-AW, H. Kostiak
               AMXSY-GW, G. A. Zeller
                 Don Waldon
               AMXSY-SMO, L. Bain

      Cdr, USATECOM

      Cdr, USAEA
        ATTN: SAREA-TD-S, J. Seigh

Quality Assurance and OPSEC Review

476

This form is an approval record for ARL generated information to be presented or disseminated external to ARL. Note: Submit all manuscripts in electronic format or camera ready copy. See attached instructions. If more space is needed, use reverse of form (include block numbers).

Section I - *To be completed by lead ARL author or COR*

A. General Information: ☐ Presentation ☐ Publication ☑ Report ☐ Multimedia ☐ BAA ☐ SBIR ☐ Invention Disclosure

1. Today's Date: 03 January, 2013	2. Due Date: 04 February, 2013	3. Unclassified Title or Solicitation Number/Title: The EDIT-COMGEOM Code

4. Author(s): (Last, First, MI): 4a. Kuehl, Gary G.	5. Site: APG Office Symbol: RDRL-SLB-S	6. Telephone Number: 410-278-1382

4b. E-mail address: clifford.w.yapp.civ@mail.mil	7. Invited: ☐ Yes ☐ No	8. Contract No.: ARL COR:

9. Key Words: COMGEOM MAGIC GIFT geometry

10. Distribution Statement: Is manuscript subject to export control? ☐ Yes ☑ No

11. Check Appropriate Letter and Number(s). See instructions:

A ☑ B ☐ C ☐ D ☐ E ☐ F ☐ X ☐   0 ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7 ☐ 8 ☐ 9 ☐ 10 ☐ 11 ☐

12. Security Classification: Unclassified

B. Presentation ☐ Conference Presentation ☐ Notable Presentation ☐ Key Note Speaker ☐ Briefing

13. Conference / Meeting Name:	14. Conference / Meeting Location:

15. Conference / Meeting Date	16. Conference / Meeting is: ☐ Classified ☐ Open to General Public ☐ Unclassified / Controlled Access ☐ Other

17. For nonpublic meetings: Will foreign nationals be attending? ☐ Yes ☐ No ☐ Don't know	18. Countries and International Agreement(s) of Foreign Nationals:

C. Publication ☐ Abstract ☐ Book ☐ Book Chapter ☐ Conference Proceeding ☐ Refereed Journal Article ☐ Other

19. Material will be submitted for publication in:

Journal Title: Country:

D. Report ☑ TR ☐ MR ☐ TN ☐ CR ☐ SR

20. Project No.: IT662618AH80	21. Period Covered (mm/yyyy) 9/1/75	22. Sponsoring Agency: U.S. Army Ballistic Research Laboratories

E. Multimedia ☐ Software ☐ Web ☐ Poster ☐ Video Clip ☐ Other

23. Location:

F. Author's Statement

24. All authors have concurred in the technical content and the sequence of authors. All authors have made a substantial contribution to the manuscript, and all authors who have made a substantial contribution are identified in Block 4.

ARL Lead Author or COR X _Clifford Yapp_   Date 01/03/2013

Section II - *Approval to be completed by designated individual*

G. Technical Review

25. Technical Reviewer Name	X _Clifford Yapp_ Technical Reviewer Signature	Date 01/03/2013

H. Technical Publications Editorial Review

26. Editor Name	X _____ Editor Signature	Date

I. Supervisor Review

27. Supervisor Name	X _Stephanie Reed_ Supervisor Signature	Date 01/04/2013

| Section III - | To be completed by an ARL Trained Internal OPSEC Reviewer |

OPSEC Review Checklist

OPSEC POC: Complete and explain any positive responses in block 28.
Note: ARL must be the proponent of the proposed information for release.

1. Does this material contain Sensitive Information?	☐ YES ☒ NO	c. Any weapon systems/component test results?	☐ YES ☒ NO
2. Does this information contain state-of-the-art, breakthrough technology?	☐ YES ☀ NO	d. Any ARL-originated studies or after action reports containing advice and recommendations?	☐ YES ☒ NO
3. Does the United States hold a significant lead time in this technology?	☐ YES ☒ NO	e. Weakness and/or vulnerability information?	☐ YES ☒ NO
		f. Any information on countermeasures?	☐ YES ☒ NO
4. Does this information reveal aspects of reverse engineering?	☐ YES ☒ NO	g. Any fielding/test schedule information?	☐ YES ☒ NO
5. Does this material reveal any security practices or procedures?	☐ YES ☒ NO	h. Any Force Protection, Homeland Defense (security) information?	☐ YES ☒ NO
6. Would release of this information be of economic benefit to a foreign entity, adversary, or allow for the development of countermeasures to the system or technology?	☐ YES ☒ NO	i. Information on subjects of potential controversy among military services or other federal agencies?	☐ YES ☒ NO
		j. Information on military applications in space, nuclear chemical or biological efforts: high energy laser information; particle beam technology; etc?	☐ YES ☒ NO
7. Does this material contain:		k. Contain information with foreign policy or foreign relations implications?	☐ YES ☒ NO
a. Any contract proposals, bids, and/or proprietary information?	☐ YES ☒ NO		
b. Any information on inventions/patent application for which patent secrecy orders have been issued?	☐ YES ☒ NO	l. Does this information contain current ARL Essential Elements of Friendly Information (EEFI)?	☐ YES ☒ NO

J. Internal OPSEC Review

28. OPSEC Review Comments / Explanations / Continuations:

29. Internal OPSEC Approval Statement:

> I, the undersigned, am aware of the adversary's interest in DoD publications and in the subject matter of this material and that, to the best of my knowledge, the net benefit of this release out weighs the potential damage to the essential security of all ARL, AMC, Army, or other DoD programs of which I am aware.

RONALD A. BOWERS
OPSEC Reviewer Name

X _Ronald A. Bowers_
OPSEC Reviewer Signature

Date 7 Jan 2013

| Section IV - | To be completed by designated individual. |

K. Security

30. Foreign Disclosure Office *(Limited distribution information for release to foreign nationals)*
FDO Reviewer Name   FDO Reviewer Signature X ____   Date ____   N/A: ☒

31. Classified Information:
Classified by/Derived from: ____   N/A: ☒
Declassified on date: ____   Security Manager X ____   Date ____

32. Foreign Intelligence Office *(Limited distribution information)*
FIO Reviewer Name   X ____   N/A: ☒
          FIO Reviewer Signature   Date

33. ARL OPSEC Officer   *Material has been reviewed for OPSEC Policy and* ☒ IS / ☐ IS NOT *acceptable for public release.*
Comments:

X _Erich W. Meyerhoff_
ARL OPSEC Officer Name   ARL OPSEC Officer Signature   Date 1/9/13

L. Division Chief

34. The information contained in this material has received appropriate technical / editorial review and ☒ IS / ☐ IS NOT *acceptable for public release.*

Denise A. Jordan for
Bob Bowen
Division Chief Name   X _____ Division Chief Signature   Date 2/3/13

M. Public Affairs Office

35. The information contained in this material has received appropriate technical / editorial review and ☒ IS / ☐ IS NOT *approved for public release.*

Joyce M. Conant
PAO Reviewer Name   X _Joyce M. Conant_ PAO Reviewer Signature   Date 1/10/13